


ALL INDIA NETWORK

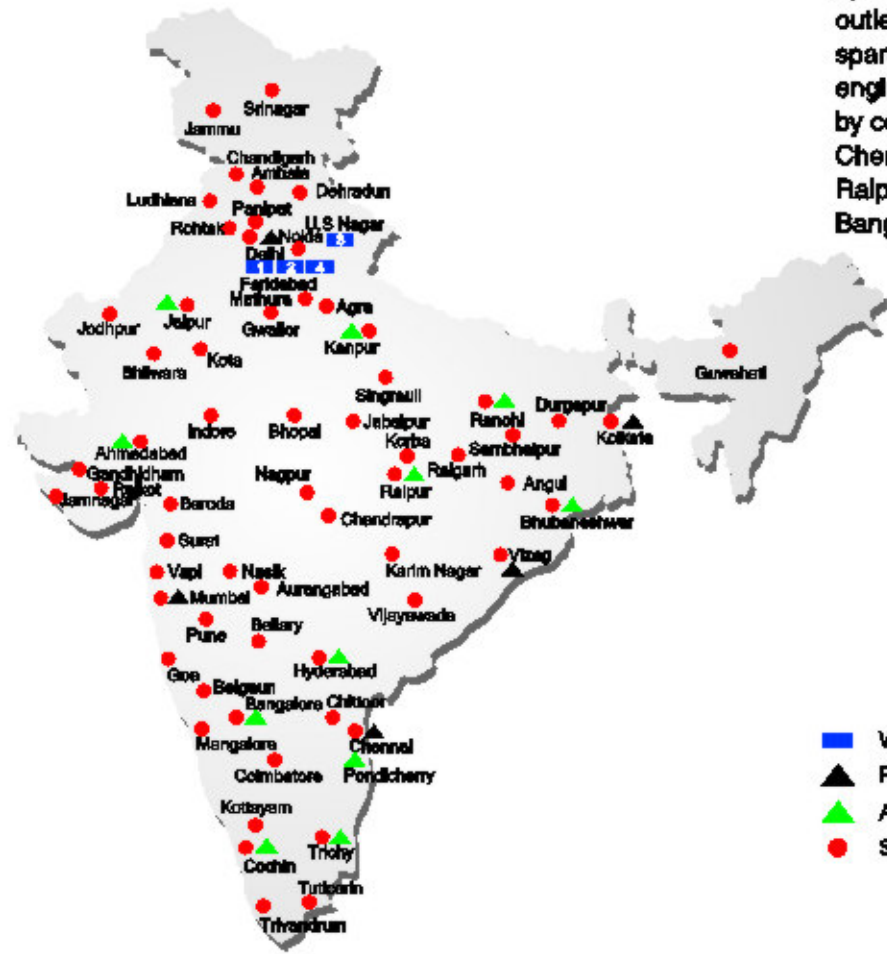

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Jaipur, Ranchi, Raipur, Bhubneshwar, Kanpur, Hyderabad, Bangalore, Pondicherry, Vizag, Trichy & Cochin

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS

MARKETING H.Q.

5th Floor, "TDI Center", Jasola, New Delhi - 76
Ph.: +91-11-40549900 (30 Lines) Fax: 40549922
E-mail: marketing@ace-cranes.com
: forklifts@ace-cranes.com

MUMBAI OFFICE

31, "Kalpataru Court", Chembur, Mumbai - 71
Ph.: 022 - 25208846 Telefax: 25207071
E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Fomra Towers" 84-A, Second Floor, AJC Bose Road,
Kolkatta - 14. Ph. 033-32578307, Telefax: 22274428
E-mail: acekolkatta@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road,
Alwar Pet, Chennai - 18
Ph.: 044 - 24314253 Telefax: 24314252
E-mail: acechennai@ace-cranes.com

www.ace-cranes.com

ACE

TH620

Hydraulic Mobile
Tele Handler

ACE INDIA'S LEADING
MOBILE CRANE COMPANY



Nothing beats an ACE

Developed by ACE, India and Faresin, Italy



ACE

Action Construction Equipment Ltd.

Contact:



ACE / Original equipment manufacturer reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by 20%. Accessories shown are not part of the Standard Equipment.





Specifications

TH620

CAPACITY		BOOM & CARRIAGE	The pivoted 2part boom is fabricated from high strength steel and is fitted with nylon pads to provide smooth extension and retraction of the boom extension.
Lifting Capacity (max.)	2200 kgs.	TYRES	
Lifting Height	5.7 mtrs	Front & Rear	13.00 x 24 (4 Nos.) or 13.00 x 24 (2 Nos.) and 12.5 x 80-18 (2 Nos.)
Capacity at max. Height	1200 kgs.	SAFETY	<ul style="list-style-type: none"> ● Audio overload indication. ● Safety check valves are fitted on cylinders to lock and hold the lifted loads. ● Reverse Alarm
Capacity at max. reach	700 kgs.	FLUID CAPACITIES	
Reach at max. load	1000 mm	Fuel Tank	80.00 Ltrs.
ENGINE	KOEL 4R1040T Turbocharged 4 cylinder, diesel engine or suitable engine.	Hydraulic Tank	100.00 Ltrs
Rated Power	70.6 kw @ 2200 rpm	Transmission Oil	17.00 Ltrs
TRANSMISSION	Hydraulic Transmission with smooth and easy gear shift, increases efficiency and reduces operator fatigue. Heavy duty Axles for smooth movement and provide efficient traction. Permanent 4 wheel drive.	Front Axle	
Top Speed	30 KMPH without load.	Differential Hub	14.5 Ltrs
HYDRAULIC SYSTEM	<ul style="list-style-type: none"> ● Gear pump:- 110 lts/min. flow. Suction line has 100 mesh size strainer while return line is fitted with 25 micron full flow filter. ● Operating hydraulic system pressure 3500 PSI. 	Rear Axle	1.5 x 2 Ltrs
STEERING	Hydrostatic power steering is provided.	Differential Hub	7.5 Ltrs
BRAKES	Hydraulically assisted service brakes are oil immersed multi disc type on front and rear wheels. These self adjusting brakes require little maintenance. Parking Brake is provided.	Engine	0.8 x 2 Ltrs
ELECTRICAL SYSTEM	12V Negative earth system.	STANDARD EQUIPMENT	<ul style="list-style-type: none"> ● Fully enclosed wide view cabin. ● Front and rear work lights. ● Reflectors and rear view mirror(s) ● Tool Kit ● Gauges <ul style="list-style-type: none"> - Hour meter - Water temperature - Engine oil pressure - Ammeter - Speedometer
		OPTIONAL EQUIPMENT	<ul style="list-style-type: none"> ● Crane Attachment ● Drum/Barrel handling attachment ● Ram attachment ● Bucket ● Basket ● 4 Wheel steering ● Load movement indicator for safe load indication and cut off. ● Rotating Beacon Light
		OPERATING WEIGHT	6500 kgs.



TH620

Hydraulic Mobile Tele Handler

