



Front End Loader

Factory Fitted Front End Loader




- Low diesel consumption
- ACE Ki Warranty
- 360° operator visibility
- 4 D positional valve (Joystick) Mechanism for enhanced operator comfort

TECHNICAL SPECIFICATION

Chetak DI 65 with Front End Loader

Engine		
Engine Make	ACE	
Engine Model	A50 HT	
HP/kW	50/36.9	
No. of cylinders	4	
Aspiration	Natural Aspirated	
Bore/Stroke (mm)	105/118	
Cubic capacity (cc)	4088	
Rated RPM	2200	
Air cleaner	Dry Air cleaner with	
	Clogging Sensor	
Max Torque	245 @ 1300	
(Nm @ RPM)		
TRANSMISSION		
Drive	2WD	
Clutch	Dual Clutch	
	Friction plate with 7 pads	
	Cerametallic	
Gear Box	8F + 2R	
Transmission Type	Constant Mesh	
STEERING		
Steering	Power Steering	
TYRE		
Front	7.50 x 16 LT (Loader Special)	
Rear	16.9 x 28	
Speed Forward		
Speed (Km/h) @ rpm	2.3-34@2200	
Reverse Speed	3.00-12@2200	

Hydraulic Pump High Flow (Tendam Pump) cc		35
Front Axle		Heavy Duty
Front End Loader		
(I)	Maximum Operating Height in mm	4200
(j)	Load Over height in mm	3570
(k)	Pin Height in mm	3580
(I)	Dump Height in mm	2690
(m) Reach at ground in mm		1980
(n)	Reach at full dump in mm	630
(o)	Roll back at round in degree	50
(p)	Dump Angle in degree	45
	Bucket Volume capacity in cu.m.	0.60
	Safe working Load in kg (min)	750

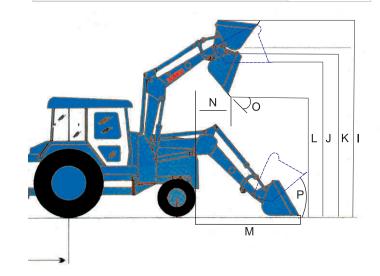

AOD

Action Construction Equipment Ltd.

Marketing Head Office

Jajru Road, 25 Mile Stone, Mathura Road, Ballabgarh - 121004 (Haryana)

Ph.: +91-129-2306111, E-mail: marketingtd@ace-cranes.com







CVI

ISO 9001

Authorised Dealer



Note: In view of policy of continuous improvements, technical specifications can be varied without prior information. For detailed knowledge, please consult ACE marketing or Authorized Dealer. Accessories shown are not part of the standard equipment.